


Perfect choice for Access Control

Akuvox's X915S HID iClass is designed to provide a visually stunning and intuitive user-experience. It brings a number of innovative new features to provide a fully customizable solution for occupant and visitor access control in condominiums, apartment buildings, office buildings, gated communities and industrial buildings.

At a Glance

- Vandal resistant body, with 8inch touchscreen;
- Android operation system;
- Wide-angle camera: 120° (H), 67° (V);
- Two-way audio communication over IP networks with Echo Cancel feature;
- Multi-way access feature including: Face, Card, PIN, BLE & QR code;
- Flush-mounted & surface-mounted;
- Complies with SIP & ONVIF;
- Support HID iClass 13.56MHz Cards

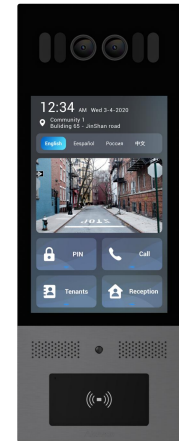

Physical & Power

- | | |
|--|--|
| • Front Panel: 316 grade stainless steel | • BLE: Support |
| • Display: 8 Inch IPS LCD | • Microphone: 2 |
| • Main Camera: 5M pixels, with starlight | • Speaker: 2 |
| • Light Sensor: Support | • Tamper Alarm: Support |
| • Motion Sensor: Support | • Reset: 1 |
| • Wiegand Port: Support | • Ethernet port: 1xRJ45, 10/100Mbps adaptive |
| • RS485 Port: Support | • 802.3af Power-over-Ethernet+ |
| • Line Out: Support | • IP Rating: IP66 |
| • 13.56MHz Card Reader Support:
ISO14443A, ISO14443B, ISO15693,
HID iClass, HID SEOS | • IK Rating: IK10 |
| • Relays Out: 3 | • Installation: Flush-mounted & Wall-mounted |
| • Inputs: 3 | • Size: 350x130x37.9mm |
| | • Working Humidity: 10~90% |
| | • Working Temperature: -40°C ~ +60°C |
| | • Storage Temperature: -40°C ~ +70°C |

Audio

- SIP v1 (RFC2543), SIP v2 (RFC3261)
- Narrowband audio codec: G.711a, G.711μ
- Wideband audio codec: G.722
- DTMF: In-band, out-of-band DTMF (RFC2833), SIP Info
- Echo Cancellation
- Voice Activation Detection
- Comfort Noise Generator

Video

- Sensor: 1/2.7", CMOS for main camera
- Pixels: CIF, QCIF, VGA, 4CIF, 720p, 1080p
- Video codec: H.264
- Video technology: HDR
- Video resolution: up to 1920x1080
- Max. image transfer rate: 1080p – 30fps
- Viewing angle: 120°(H) / 67°(V)
- Compatible to 3rd-Party-Video components, e.g. NVRs

Networking & Protocol

- Protocols support: IPv4, HTTP, HTTPS, FTP, DNS, NTP, RTSP, RTP, TCP, UDP, ICMP, DHCP, ARP

Door Entry Feature

- Android OS for any 3rd party software or customization
- Relays controlled individually by DTMF tones
- Multi-way Unlock: Face, Card, PIN, BLE & QR code
- Camera permanently operational
- Auto-night mode with LED illumination
- White balance: auto
- Minimum illumination: 0.1LUX

Deployment & Maintenance

- Auto-Provisioning
- Web management portal
- Web-based packet dump
- Configuration backup / restore
- Entry log export
- Access table export / import
- Firmware upgrade
- System logs (include door access logs)

Application Scenario

- Provides resident / visitor access control for buildings such as condominiums, apartment buildings, office buildings, gated communities and industrial buildings